


Bocce Builders of America World Synthetic Bocce Court Specifications

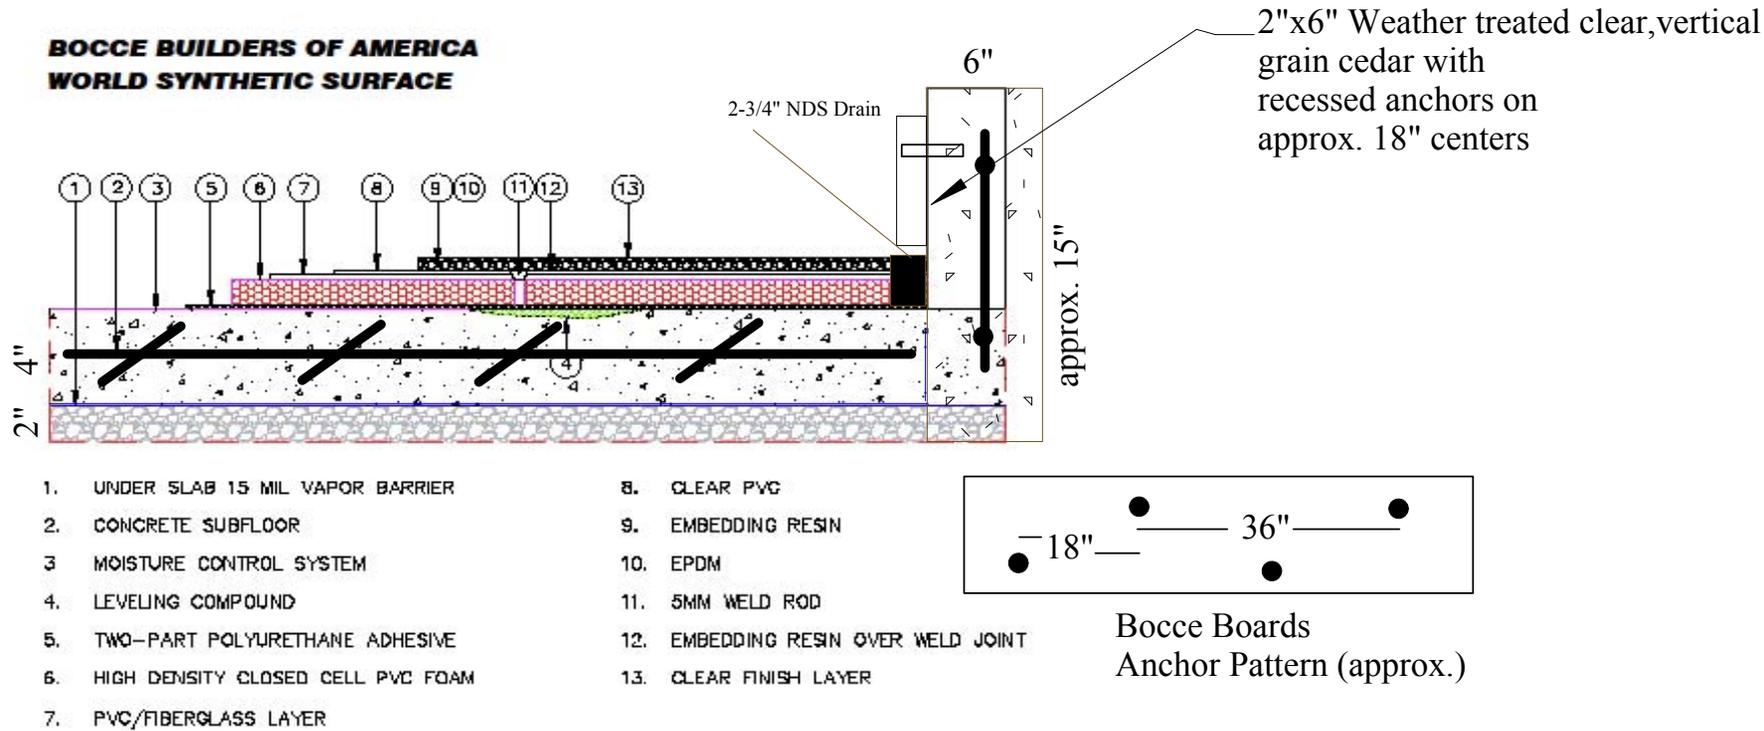

Construction notes: Concrete Stem wall to have 2 horizontal bars of 1/2" steel tied with 3/8" vertical bars on approx. 24" centers

MAR./2013

4" Base pad will have 3/8" rebar placed on 18" centers running both directions.

Mix Design--unless specified will be 5.5-6 sack mix with minimum 2500 psi.